

Kladka pre vedenie lana, vybavená guľôčkovými ložiskami model DSRB S



Technické údaje model DSRB

Model	EAN-kód 4025092* 4050939***	Klasifikácia FEM/ISO	Ťahová sila v kg pri uhle 90°	Ťahová sila v kg pri uhle 180°	Priemer lana mm
DSRB S 90/4	***066062	2m/M5	700	500	3-4
DSRB S 90/6	***066123	1Dm/M1	700	500	5-6
DSRB S 145/7	*990424	1Am/M4	1100	800	7
DSRB S 185/8	***065843	2m/M5	2300	1630	8
DSRB S 270/12	***065980	2m/M5	2500	1800	9-12
DSRB S 400/16	***066130	3m/M6	5000	3800	13-16
DSRB S 490/20	***065751	3m/M6	8000	6000	20

Všetky kladky sú na požiadanie dostupné ako individuálny komponent.

Rozmery model DSRB

Model	DSRB S 90/4	DSRB S 90/6	DSRB S 145/7	DSRB S 185/8	DSRB S 270/12	DSRB S 400/16	DSRB S 490/20
EAN-kód	***066062	***066123	*990424	***065843	***065980	***066130	***065751
B, mm	85	85	125	138	191	302	313
C, mm	90	90	160	195	290	430	580
Ø D, mm	90	90	145	185	270	400	490
Ø D1, mm	20	25	25	30	40	50	65
Ø Dm, mm	80	78	126	160	246	368	450
E, mm	62	62	88	106	138	212	220
H, mm	134	134	224	273	407	612	694
K, mm	65	65	110	135	202	310	340
L, mm	120	120	200	245	360	530	650
Ø M/M1, mm	9/9	9/9	11.5/13	13.5/15	18/20	26/30	34/40
S, mm	4	6	6	8	10	15	16

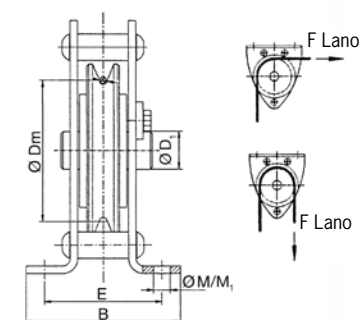

Dostupný aj vo verzii odolnej voči výbuchu (viď. str. 465).

Štandardné laná pre ručné navijaky Pfaff-silberblau podľa DIN 3060

INFO

Dodatočné príslušenstvo žiadajte dopytom

Objednávacie číslo - EAN

Priemer lana	Minimálna únosnosť kN	Použitelná dĺžka lana 5m	Použitelná dĺžka lana 10m	Použitelná dĺžka lana 15m	Použitelná dĺžka lana 20m	Nosnosť strmeňa kg
4 mm - DIN 3060	10.1	4050939 050924	4050939 050962	4050939 051075	4050939 051204	500
5 mm - DIN 3060	15.8	4050939 050955	4050939 050993	4050939 051143	4050939 051235	1000
6 mm - DIN 3060	22.8	4050939 050986	4050939 051167	4050939 051266	4050939 051358	1000
7 mm - DIN 3060	31.0	4025092 990585	4050939 051211	4050939 051365	4050939 051549	1000
7 mm - DIN 3069 ¹	43.9	-	-	4050939 051624	-	1600

¹ Lano so zvýšenou minimálnou únosnosťou pre LB 1200kg